


BACK SIDE OF FRONT DOOR

SYM	STANDARD COMPONENT DESCRIPTION
CB1	AC INPUT 3-POLE CKT BKR (HD3)
CB2	DC OUTPUT 2-POLE CKT BKT (JD2)
DS01	AC POWER INDICATOR (GREEN)
DS02	DC POWER INDICATOR (GREEN)
P1A	LINE 1 AC TEST POINT
P1B	LINE 2 AC TEST POINT
P1C	NEUTRAL TEST POINT
P1D	GROUND TEST POINT
P2A	POSITIVE (+) DC TEST POINT
P2B	NEGATIVE (-) DC TEST POINT
SO1A	LINE 1 AC CONNECTOR
SO1B	LINE 2 AC CONNECTOR
SO1C	NEUTRAL AC CONNECTOR
SO1D	GROUND CONNECTOR
SO2A	POSITIVE (+) DC CONNECTOR
SO2B	NEGATIVE (-) DC CONNECTOR
SO4	120Vac 1PH 60Hz 20A GFI OUTLET

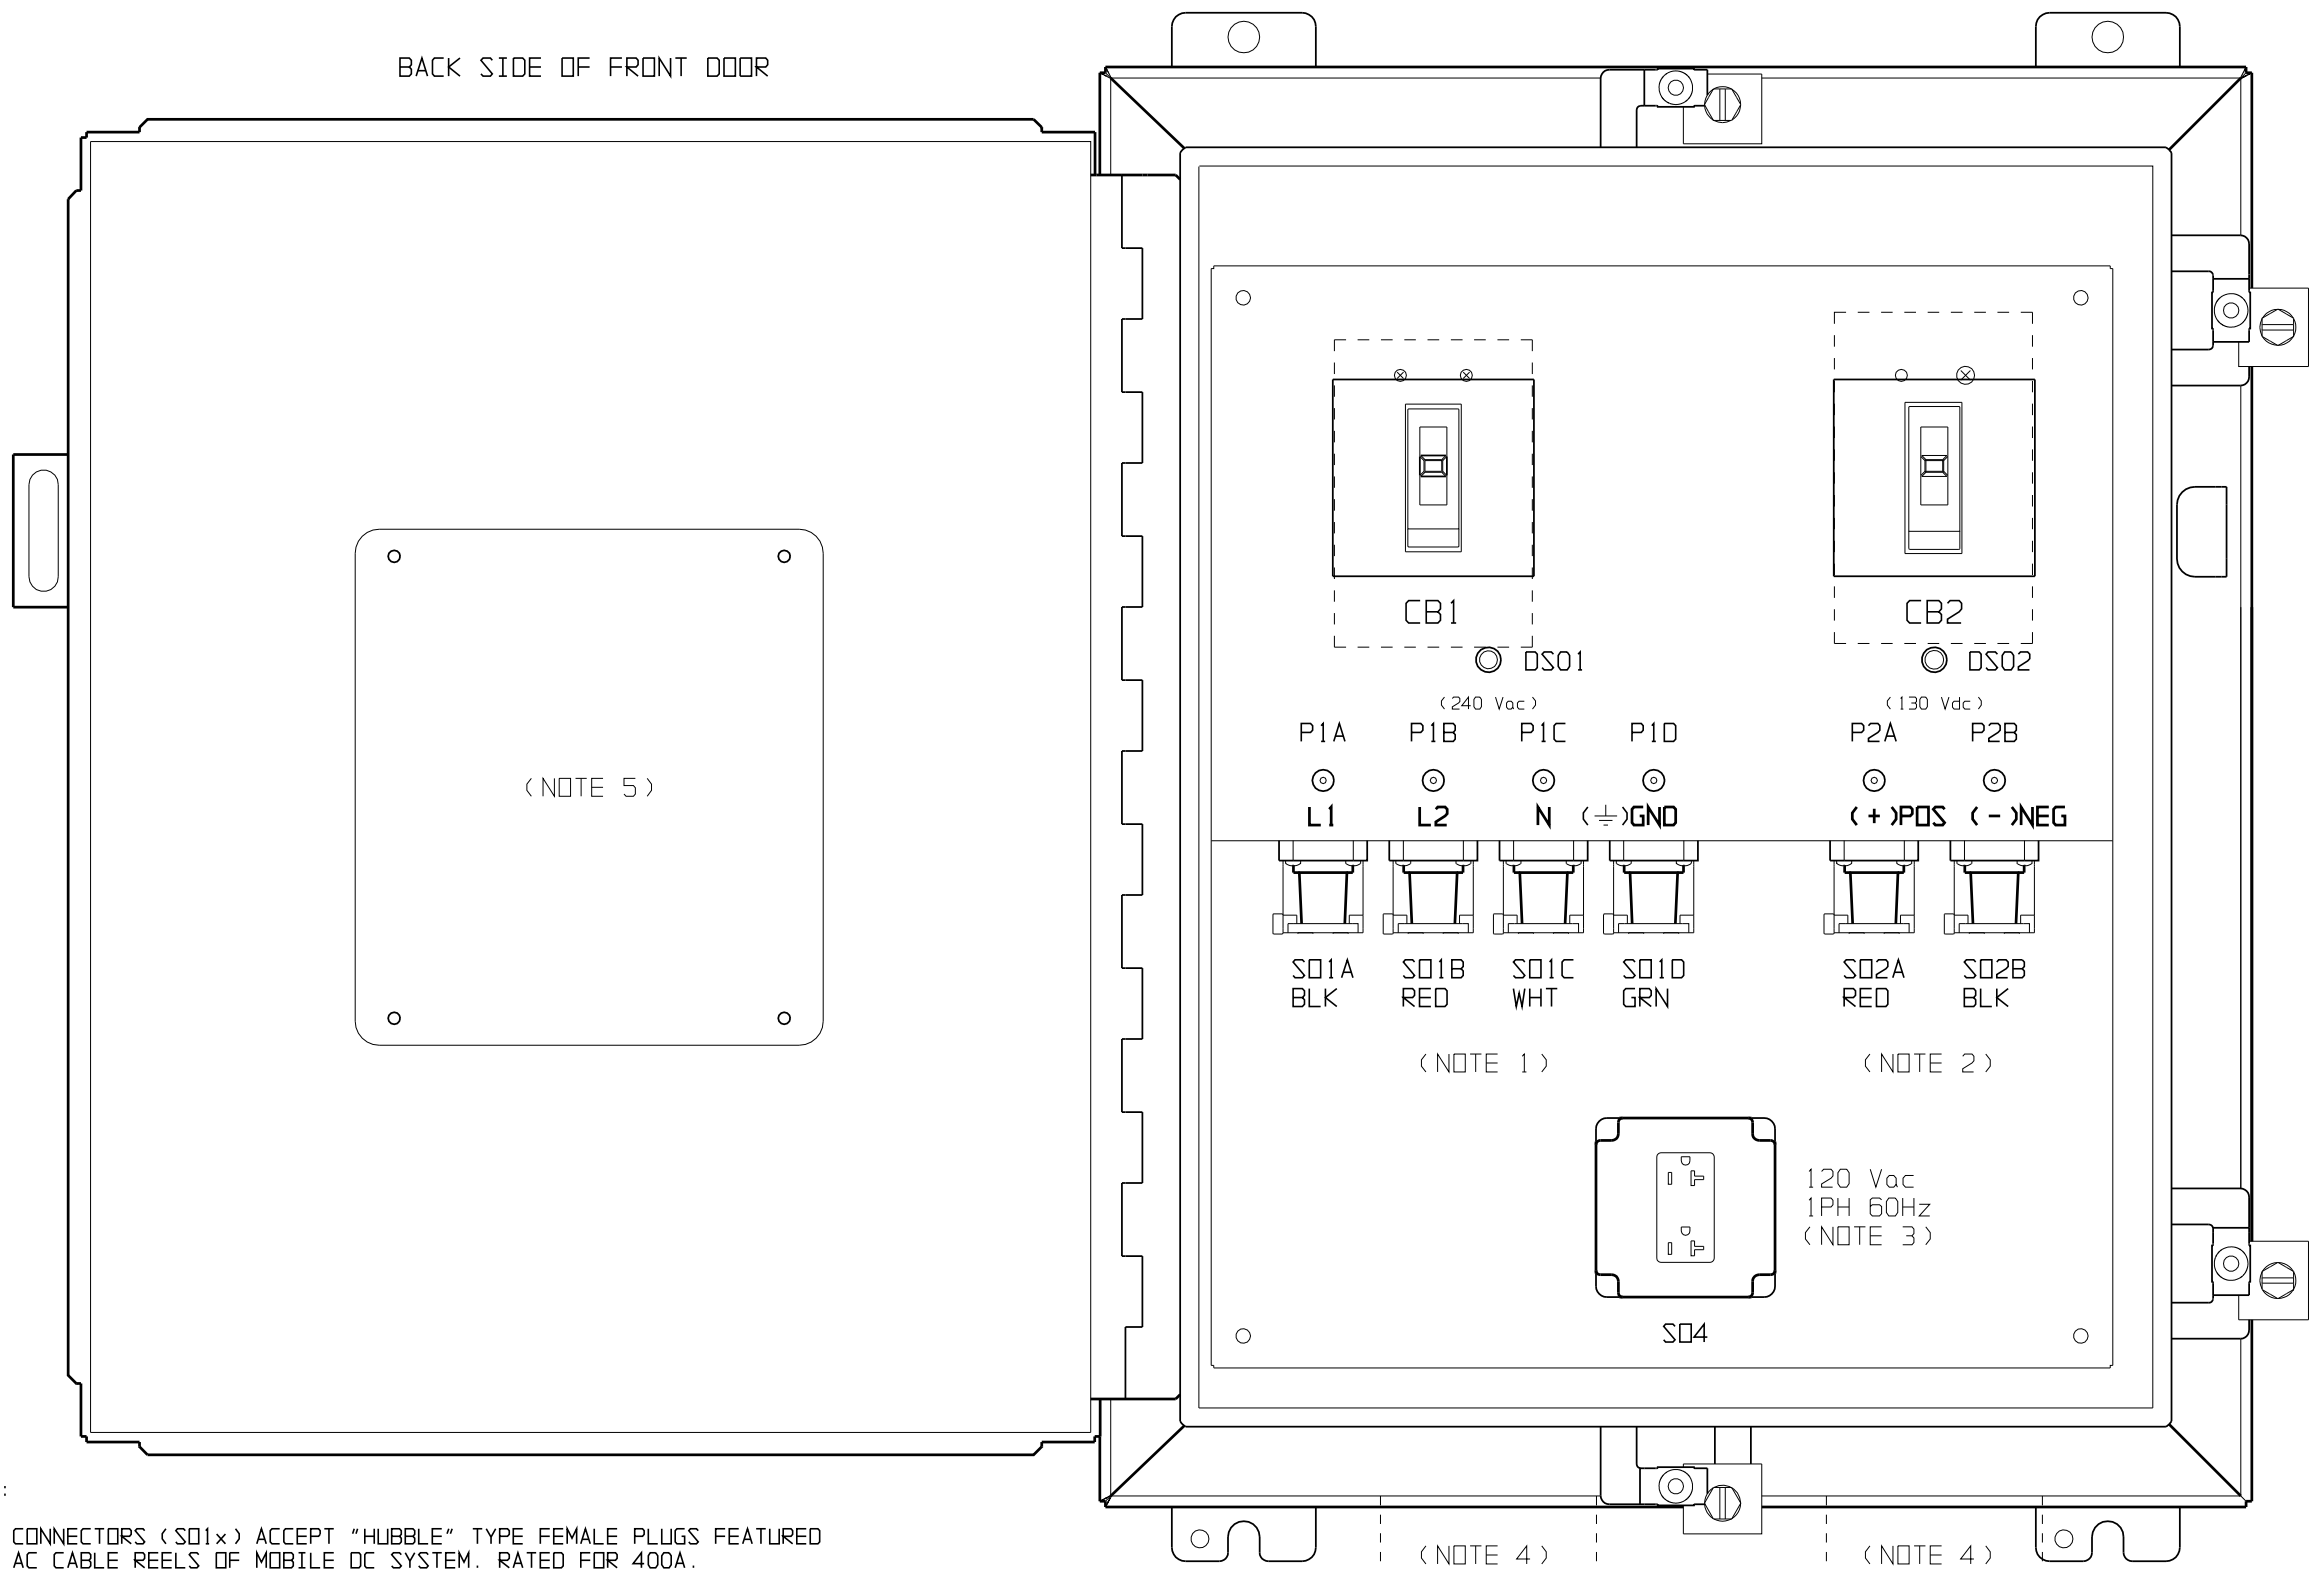

- NOTES:
- 1) AC CONNECTORS (SO1x) ACCEPT "HUBBLE" TYPE FEMALE PLUGS FEATURED ON AC CABLE REELS OF MOBILE DC SYSTEM. RATED FOR 400A.
  - 2) DC CONNECTORS (SO2x) ACCEPT "HUBBLE" TYPE MALE PLUGS FEATURED ON DC CABLE REELS OF MOBILE DC SYSTEM, RATED FOR 400A.
  - 3) GFI OUTLET (SO4) 120 Vac SOURCED FROM SITE AC PANEL, NOT FROM 240 Vac SPLIT-PHASE (SO1x), POWERING MOBILE DC SYSTEM.
  - 4) ENCLOSURE FEATURES TWO (2) 4.50in / 114mm BOTTOM-ACCESS HOLES, WITH THREE (3) INTERNAL PLUGS AND LANYARDS SUPPLIED.
  - 5) OPERATING PROCEDURE LISTED ON ENGRAVED PLATE AFFIXED TO INSIDE PANEL DOOR. FOR FURTHER DETAILS, SEE USER INSTRUCTIONS JA5115-00.

			 THIRD ANGLE PROJECTION		TITLE TRAILER CONNECTION PANEL (TCP) INTERNAL COMPONENT / CONNECTION LAYOUT		
			DRAWN BY MCR 062518	DRAWING No JE5278-12			REV B
			ELECTRONIC APPROVAL SIGNATURES MAINTAINED BY MFG ECN LOG		SCALE NTS		
			UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		PART No JE5278-12		
REV	ECN No	DATE				SHEET 1 OF 1	